

# TT250/TT500

TACK DISTRIBUTOR



## POWER TO PUMP.

Weiler tack distributors are powered by a 5.5 hp (41 kW) Honda engine with clutched pump for easier starting and electric start option. The direct-drive pump is designed for asphalt with a capacity of 15 gpm (57 L/min).



## HIGH BTU BURNER.

The 300,000 BTU burner provides quick heating times. Dual propane tanks provide extended use between changes and the push button ignitor simplifies the lighting process.



## SPRAY WAND.

The 5' 6" (1.7 m) spray wand and 50' (15 m) hose reel provide optimal coverage range for tight jobsites.




## FOLD-ABLE SPRAY BAR.

The optional spray bar folds from 6' (1.8 m) to 9' (2.7 m) and features 7 independently controlled nozzles for optimal coverage. The optional wireless remote for the spray bar allows operation away from the machine.



## SIMPLE OPERATION.

Numbered valves and valve operation decals clearly specify machine setup for warmup/recirculation, spray, reclaim and cleanout operations.

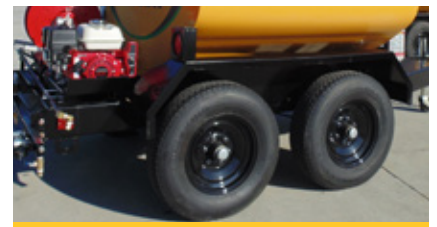

## HEAVY DUTY TRAILER.

4,000 lb (1814 kg) GVWR trailer for the TT250 and 7,200 lb (3266 kg) GVWR trailer for the TT500 feature either ball or pintle hitch, electric brakes, emergency break-away brake system, safety tow chains and pre-wired 6-pin connector.

# TT250/TT500 SPECIFICATIONS

<b>TT250 CAPACITY</b>	250 gal	946 L	<b>TT500 CAPACITY</b>	500 gal	1892 L	<b>BURNER</b>	1 x 300,000 BTU
<b>TT250 SHIP WEIGHT</b>	1,850 lb	839 kg	<b>TT500 SHIP WEIGHT</b>	2,900 lb	1315 kg	<b>ENGINE</b>	Honda
<b>TT250 WORK WEIGHT</b>	4,000 lb	1814 kg	<b>TT500 WORK WEIGHT</b>	7,200 lb	3266 kg	<b>HORSEPOWER</b>	5.5 hp    41 kW
<b>TT250 HEIGHT</b>	80"	2032 mm	<b>TT500 HEIGHT</b>	86"	2184 mm	<b>PUMP</b>	15 gpm    57 L/min
<b>TT250 LENGTH</b>	10'	3048 mm	<b>TT500 LENGTH</b>	14'	4267 mm	<b>HOSE REEL</b>	50'    15 m
<b>WIDTH</b>	78"	1981 mm	<b>WIDTH</b>	78"	1981 mm	<b>FLUSH TANK</b>	13 gal    49 L

## POWERTRAIN

- 5.5 hp (41 kW) Honda engine
- Electric engine start option
- 15 gpm (57 L/min) direct-drive asphalt pump with integral relief valve

## TRAILER

- 4,000 lb (1814 kg) GVWR trailer for TT250
- 7,200 lb (3266 kg) GVWR trailer for TT500
- Ball or pintle hitch equipped
- Electric brakes
- Emergency break-away brake system
- Safety tow chains
- Pre-wired with a 6-pin connector

## TACK TANK

- 250 gal (946 L) or 500 gal (1892 L) capacity
- 300,000 BTU burner
- 20 lb (9 kg) dual propane tanks
- Push button igniter
- Fluid level indicator
- Tack temperature gauge
- DOT 406 emergency venting relief valve
- Optional electric tank heater w/ adjustable temperature control

## SERVICE/MAINTENANCE

- 13 gal (49 L) flush tank for cleaning solvent
- Reclaim and cleanout functions
- Removable spray nozzles

## MATERIAL DELIVERY

- 50' (15 m) hose reel
- 5'6" (1.7 m) spray wand
- Optional rear-mounted spray bar, adjustable 6' (1.8 m) to 9' (2.7 m)
- Ball valves allow individual control of 7 spray bar nozzles
- Optional wireless spray bar control remote
- Tank recirculation valve
- Numbered valves for simplified operation

## OPTIONAL EQUIPMENT

- 2 5/16" (58 mm) ball hitch
- Pintle hitch and ball hitch group
- Spare tire and mount
- Spray bar with manual valve control
- Wireless remote for spray bar
- Electric start
- Electric tank heat

## SALES AND SERVICE

Sold and serviced exclusively through Caterpillar dealers worldwide.

## WARRANTY

12 months standard. Extended warranty available.