

# TACK DISTRIBUTORS




## **POWER TO PUMP.**

Weiler tack distributors are powered by either a 5.5 hp (4.1 kW) or 9.5 hp (71 kW) Kohler engine. Diesel engine available on select models. Electric start standard or an available option. Heavy-duty asphalt pump is direct-drive or hydraulically driven with a max output of 11 gpm (42 L/min).



## **HIGH BTU BURNER.**

A 300,000 BTU propane burner provides quick heating times. Dual propane tanks or optional diesel burner provide extended use. A push button ignitor to simplify the lighting process. Electric overnight tank heat option available.

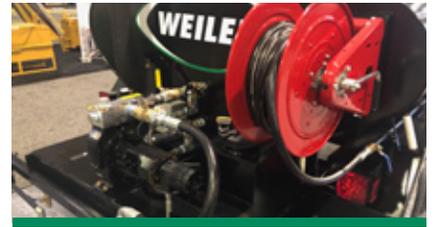


## **SPRAY WAND.**

The 5' 6" (1.7 m) spray wand and 50' (15 m) hose reel provide optimal coverage range for tight jobsites.




## **FOLD-ABLE SPRAY BAR.**

The optional spray bar features 7 or 9 independently controlled nozzles for optimal coverage up to 10' (3048 mm) or 12' (3658 mm). The optional wireless remote for the spray bar allows operation away from the machine.

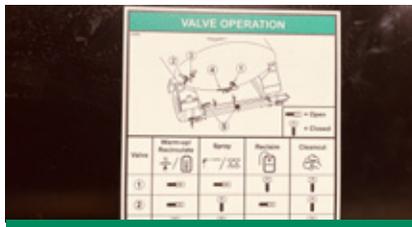

## **SIMPLE OPERATION.**

Numbered valves and valve operation decals clearly specify machine setup for warmup/recirculation, spray, reclaim and cleanout operations. Fluid level indicator and tack temperature gauge are easily visible to the operator. Equipped with flush tank for cleaning solvent.

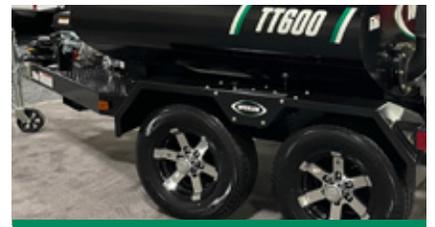

## **HEAVY DUTY TRAILER.**

Heavy duty trailer features either ball or pintle hitch, electric brakes, emergency break-away system, safety tow chains and pre-wired 6 pin connector. Optional aluminum wheels available on select models.



# TACK DISTRIBUTOR SPECIFICATIONS

## TT600

<b>CAPACITY</b>	600 gal	2271 L
<b>SHIP WEIGHT</b>	4,500 lb	2041 kg
<b>WORK WEIGHT</b>	9,300 lb	4218 kg
<b>HEIGHT</b>	81"	2057 mm
<b>LENGTH</b>	174"	4419 mm
<b>WIDTH</b>	77"	1956 mm
<b>BURNER</b>	1 x 300,000 BTU	
<b>HEAT</b>	Propane/Diesel Option	
<b>ENGINE</b>	Gas/Diesel 9.5 hp (7.1 kW)	
<b>SPRAY BAR</b>	9 nozzles w/ 12' coverage	
<b>PUMP</b>	Hydraulic Driven	
<b>FLUSH TANK</b>	6 gal	23 L

## TT250

<b>CAPACITY</b>	250 gal	946 L
<b>SHIP WEIGHT</b>	1,850 lb	839 kg
<b>WORK WEIGHT</b>	4,000 lb	1814 kg
<b>HEIGHT</b>	80"	2032 mm
<b>LENGTH</b>	120"	3048 mm
<b>WIDTH</b>	77"	1956 mm
<b>BURNER</b>	1 x 300,000 BTU	
<b>HEAT</b>	Propane	
<b>ENGINE</b>	Gas 5.5 hp (4.1 kW)	
<b>SPRAY BAR</b>	7 nozzles w/ 10' coverage	
<b>PUMP</b>	Direct Drive	
<b>FLUSH TANK</b>	13 gal	49 L

## TS300

<b>CAPACITY</b>	300 gal	1135 L
<b>SHIP WEIGHT</b>	2,200 lb	998 kg
<b>WORK WEIGHT</b>	5,050 lb	2291 kg
<b>HEIGHT</b>	71"	1803 mm
<b>LENGTH</b>	96"	2438 mm
<b>WIDTH</b>	78"	1981 mm
<b>BURNER</b>	1 x 300,000 BTU	
<b>HEAT</b>	Propane/Diesel Option	
<b>ENGINE</b>	Gas/Diesel 9.5 hp (7.1 kW)	
<b>SPRAY BAR</b>	7 nozzles w/ 10' coverage	
<b>PUMP</b>	Hydraulic Driven	
<b>FLUSH TANK</b>	6 gal	23 L

## TT500

<b>CAPACITY</b>	500 gal	1892 L
<b>SHIP WEIGHT</b>	2,900 lb	1315 kg
<b>WORK WEIGHT</b>	7,200 lb	3266 kg
<b>HEIGHT</b>	86"	2184 mm
<b>LENGTH</b>	168"	4267 mm
<b>WIDTH</b>	77"	1956 mm
<b>BURNER</b>	1 x 300,000 BTU	
<b>HEAT</b>	Propane	
<b>ENGINE</b>	Gas 5.5 hp (4.1 kW)	
<b>SPRAY BAR</b>	7 nozzles w/ 10' coverage	
<b>PUMP</b>	Direct Drive	
<b>FLUSH TANK</b>	13 gal	49 L

## TS600

<b>CAPACITY</b>	600 gal	2271 L
<b>SHIP WEIGHT</b>	2,700 lb	1225 kg
<b>WORK WEIGHT</b>	8,400 lb	3810 kg
<b>HEIGHT</b>	71"	1803 mm
<b>LENGTH</b>	130"	3302 mm
<b>WIDTH</b>	78"	1981 mm
<b>BURNER</b>	1 x 300,000 BTU	
<b>HEAT</b>	Propane/Diesel Option	
<b>ENGINE</b>	Gas/Diesel 9.5 hp (7.1 kW)	
<b>SPRAY BAR</b>	9 nozzles w/ 12' coverage	
<b>PUMP</b>	Hydraulic Driven	
<b>FLUSH TANK</b>	6 gal	23 L

## TS250

<b>CAPACITY</b>	250 gal	946 L
<b>SHIP WEIGHT</b>	1,350 lb	612 kg
<b>WORK WEIGHT</b>	3,725 lb	1690 kg
<b>HEIGHT</b>	61"	1549 mm
<b>LENGTH</b>	64"	1638 mm
<b>WIDTH</b>	52"	1321 mm
<b>BURNER</b>	1 x 300,000 BTU	
<b>HEAT</b>	Propane/Diesel Option	
<b>ENGINE</b>	Gas 5.5 hp (4.1 kW)	
<b>SPRAY BAR</b>	7 nozzles w/ 10' coverage	
<b>PUMP</b>	Direct Drive	
<b>FLUSH TANK</b>	10 gal	38 L

## TT300

<b>CAPACITY</b>	300 gal	1135 L
<b>SHIP WEIGHT</b>	2,350 lb	1065 kg
<b>WORK WEIGHT</b>	5,000 lb	2267 kg
<b>HEIGHT</b>	81"	2057 mm
<b>LENGTH</b>	141"	3581 mm
<b>WIDTH</b>	77"	1956 mm
<b>BURNER</b>	1 x 300,000 BTU	
<b>HEAT</b>	Propane/Diesel Option	
<b>ENGINE</b>	Gas/Diesel 9.5 hp (7.1 kW)	
<b>SPRAY BAR</b>	9 nozzles w/ 12' coverage	
<b>PUMP</b>	Hydraulic Driven	
<b>FLUSH TANK</b>	6 gal	23 L

## TS500

<b>CAPACITY</b>	500 gal	1892 L
<b>SHIP WEIGHT</b>	1,850 lb	839 kg
<b>WORK WEIGHT</b>	6,600 lb	2994 kg
<b>HEIGHT</b>	61"	1549 mm
<b>LENGTH</b>	93"	2362 mm
<b>WIDTH</b>	52"	1321 mm
<b>BURNER</b>	1 x 300,000 BTU	
<b>HEAT</b>	Propane/Diesel Option	
<b>ENGINE</b>	Gas 5.5 hp (4.1 kW)	
<b>SPRAY BAR</b>	7 nozzles w/ 10' coverage	
<b>PUMP</b>	Direct Drive	
<b>FLUSH TANK</b>	10 gal	38 L

## TS150

<b>CAPACITY</b>	150 gal	568 L
<b>SHIP WEIGHT</b>	1,200 lb	544 kg
<b>WORK WEIGHT</b>	2,625 lb	1191 kg
<b>HEIGHT</b>	61"	1549 mm
<b>LENGTH</b>	64"	1638 mm
<b>WIDTH</b>	52"	1321 mm
<b>BURNER</b>	1 x 300,000 BTU	
<b>HEAT</b>	Propane/Diesel Option	
<b>ENGINE</b>	Gas 5.5 hp (4.1 kW)	
<b>SPRAY BAR</b>	7 nozzles w/ 10' coverage	
<b>PUMP</b>	Direct Drive	
<b>FLUSH TANK</b>	10 gal	38 L

## SALES AND SERVICE

Sold and serviced through Caterpillar dealers worldwide.

## WARRANTY

12 months standard.